

## EASY DRIVE D+2

The new dimension for a double drive system – quality with optimised efficiency. By developing the EASY DRIVE D, DEWERT has created a double drive system which complies with the strictest international standards. At the same time, it meets the market's requirements both economically and ecologically. Equipped with most up-to-date components, the system reacts more quick and direct. It operates safely, and its low stand-by power consumption ensures that it is much more economical than other systems. In brief: **EASY DRIVE D = performance without compromise!**



### IPROXX 2

#### Single-fault protection handset

Control unit	relay control
Indicators	combined power-on / charge level indicator
Protection type	IPx6
Keys	max. 11
Equipment options	integrated mechanical or programmable multi-stage locking function, FURNIBUS interface





### PD 14 wall power supply

Output voltage	29 V DC
Output power	max. 4 A
Safety	NTC temperature sensor, primary fuse, overload protection, wide input voltage range 100-240 V AC
Supply cable	EURO plug, contour plug, UK plug, overcurrent switch-off, short-circuit-proof output

### MEGAMAT 2 EASY

#### Height adjustment

Load capacity	1500 N push/pull*
Stroke length	max. 425 mm
Fitting dimension	min. 163 mm + stroke
Adjustment speed	max. 28 mm/s
* other versions on request	

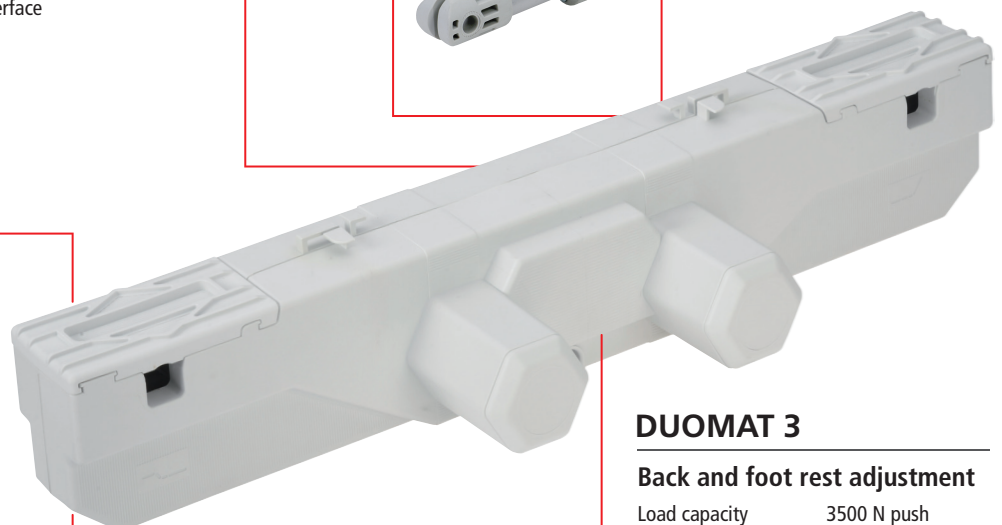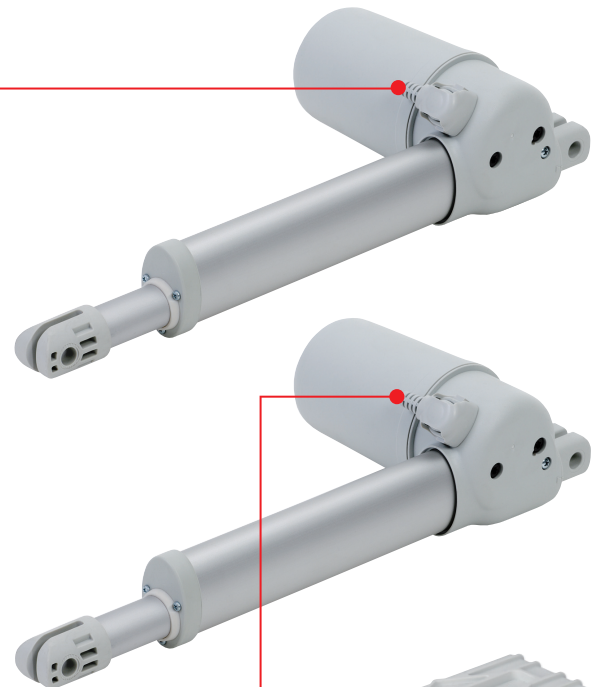

### DUOMAT 3

#### Back and foot rest adjustment

Load capacity	3500 N push
Adjustment speed	4.5 mm/s
Battery	1 x 9 V
Stand-by	0.5 W
Fitting dimension	581 mm
Stroke	69/87 mm